




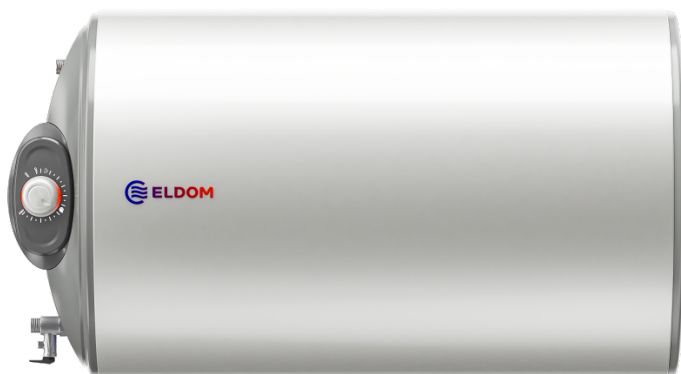

Technologies:



IP24



Discover the perfect solution for your home with this innovative water heater, combining energy saving, security and long life!

New improved design with a **white matte finish**:

- **Twin LED visual indicator**:

- red light - heating mode;
- white light - reaching the set temperature.

- **Combined regulator** for switching on and setting the temperature;

- **ECO-mode**: thermostat position at 60°C, at which the boiler operates most economically.

- **Stylish temperature indicator** - you always know how hot the water in your boiler is.

- **ENERGY-SAVING**: we use HFO Closed-Cells thermal insulation with a fine closed cell structure. This is an environmentally friendly polyurethane system of a new generation, with high energy efficiency. The over 33 mm thick insulation ensures minimal heat loss and significant savings!

- **LONG LIFE**:

- **SHIELD technology** - protection of the water tank with zirconium enamel, created using a special formula for wear resistance;

- a system of two magnesium protectors for optimal corrosion protection for the entire internal volume.

- **SAFE**: with a unique six-stage protection:

- **reliable round flange** - patented design for maximum safety in case of excessive pressure;

- **external capillary thermostat** - easily set the desired water heating temperature;

- **capillary thermal switch** - reliably protects the device from overheating;

- combined metal valve with **two protective functions** - check and safety valve;

- **"Holiday" mode** - the thermostat automatically maintains the water temperature above 5°C;

- **high moisture protection class - IP24**.

- **Electric tubular heater** - designed and manufactured by ELDOMINVEST using the latest generation technology.

- **Antibacterial protection**: when the thermostat is set to maximum, all viruses and bacteria are destroyed.

- Possibility of installing an **anode tester** - to monitor the state of anti-corrosion protection.

EAN code:

3800035780482

Installation:

Horizontal

Capacity range:	80
Water tank:	Enameled
Nominal power (kW):	3
Energy efficiency class:	C
Control:	mechanical control
Type of electric heating element:	Immersion heating element
Weight [kg]:	26.5
Dimensions ØxH [mm]:	462 x 835
Voltage [V]:	230 V~
Nominal pressure [MPa]:	0.8
IP protection:	IP24
Annual electricity consumption [kWh/annum]:	1415
Water tank:	Enameled
Nominal power (kW):	3
Nominal volume [l]:	
Load profile:	M
Colors:	