


ELDOM vertical water heater with 1 coil (left-side), 150

left-hand coil, enameled water tank, 3 kW



Technologies:

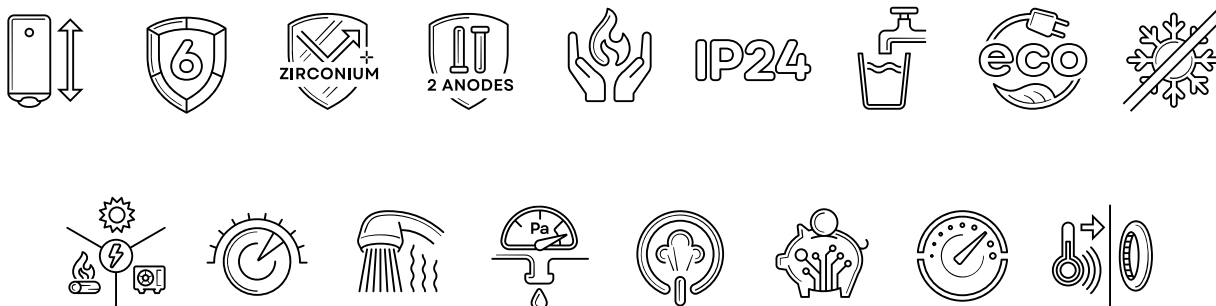

The unit is available in two versions—with the coil connections located on either the left or the right side (models ***L and ***R).

Equipped with a single coil, it is suitable for use with a heat pump, thanks to the large surface

area of the coil, which spans the entire volume of the water heater.

- **ENERGY-SAVING:**

- Sensor sleeves for the heat exchanger—designed for the installation of thermal sensors to ensure precise control of the heating system and its economical operation;
- Features HFO Closed-Cell thermal insulation with a fine, closed-cell structure. This is an eco-friendly, next-generation polyurethane system offering high energy efficiency. The insulation, exceeding 33 mm in thickness, ensures minimal heat loss and significant energy savings.

New, improved design with a matte white finish:

- **Twin LED visual indicator:**

- Red light – heating mode;
- White light – target temperature reached.

- **Combined control knob for switching the unit on and adjusting the temperature;**

- **ECO mode:** thermostat setting at 60°C, the most economical operating mode for the water heater.

- **LONG SERVICE LIFE:**

- **SHIELD technology** – the water tank is protected by a zirconium-based enamel, formulated specifically for superior wear resistance;
- A dual magnesium anode system, providing optimal corrosion protection throughout the entire internal volume.
- **SECURE:** features a unique six-level protection system:
 - a special elliptical flange – a patented design ensuring maximum safety in the event of excess pressure;
 - an external capillary thermostat – allows for easy adjustment of the desired water heating temperature;
 - a capillary thermal cut-out – reliably protects the appliance against overheating;
 - a combined metal valve with dual protective functions – acting as both a non-return and a safety valve;
 - freeze protection – the thermostat automatically maintains the water temperature above 5°C;
 - high-grade moisture protection – IP24.
- **Tubular electric heating element**, specifically designed for this model and manufactured by ELDOMINVEST using state-of-the-art technology.
- **Antibacterial protection:** setting the thermostat to the maximum level eliminates all viruses and bacteria.
- **Temperature indicator** – lets you know the current temperature of the water in your water heater at all times.
- **Illuminated switch.**

Installation:	Vertical
Capacity range:	150
Water tank:	Enameled
Energy efficiency class:	C
Weight [kg]:	60
Number of coils:	1

Dimensions ØxH [mm]:	462 x 1420
Height x Width x Depth [mm]:	1420 x 462 x 484
Nominal power (kW):	3
Nominal volume [l]:	
Colors:	