
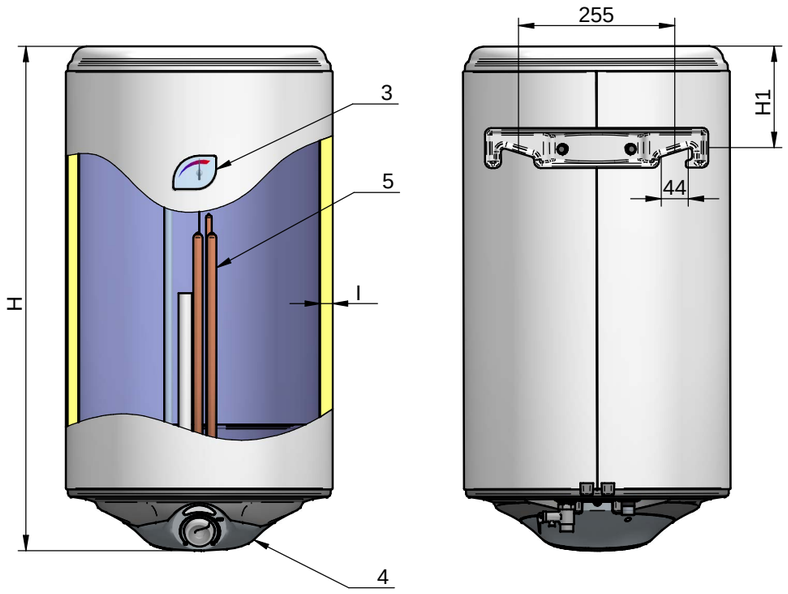


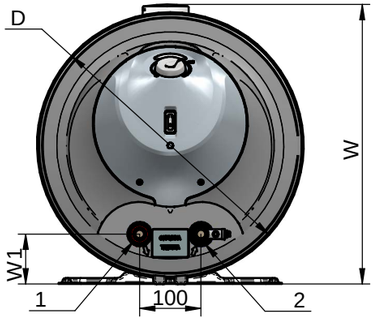

WATER HEATERS "STYLE" WITH DRY HEATING ELEMENTS FOR VERTICAL MOUNTING ON THE WALL								
CHARACTERISTICS								
Model (enameled with switch)		WVY03039FD	WVY05039FD	WVY08039FD	WVY05044FD	WVY08044FD	WVY10044FD	WVY12044FD
Model (enameled without switch)		WVY03039FDG	WVY05039FDG	WVY08039FDG	WVY05044FDG	WVY08044FDG	WVY10044FDG	WVY12044FDG
Volume range		30	50	80	50	80	100	120
Capacity	L	29	45	75	50	77	95	116
Rated presure	MPa	0,8	0,8	0,8	0,8	0,8	0,8	0,8
Energy efficiency class		C	C	C	C	C	C	C
Annual efficieny class consumption	kWh	2515	1392	1337	1381	1412	1383	1352
Thermostat temperature presetting	°C	60	60	60	60	60	60	60
Mixed water 40°C	L		70	118	73	120	144	188
Rated voltage	V~	230	230	230	230	230	230	230
Rated electrical power	kW	2x0,8	2x0,8	2x1,0	2x0,8	2x1,0	2x1,0	2x1,0
Gross weight	kg	14,5	18,5	25,5	18	23	27	30,5
CONNECTIONS								
1: Hot water outlet		G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M
2: Cold water inlet - Drain		G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M
3: Temperature indicator		Yes	Yes	Yes	Yes	Yes	Yes	Yes
4: Control panel		Yes	Yes	Yes	Yes	Yes	Yes	Yes
5: Flange with heating elements		Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIMENSIONS								
H	mm	568	768	1133	615	825	1000	1165
H1	mm	155	155	155	175	175	175	175
D	mm	387	387	387	435	435	435	435
W1	mm	80	80	80	85	85	85	85
W	mm	410	410	410	455	455	455	455
I	mm	33	33	33	20	20	20	20

D - water heater with two dry tubular electric heating elements